


General Tolerance	Dimension: ±	n.a.	General
acc. to: NA	Angle: ±	n.a.	roughness

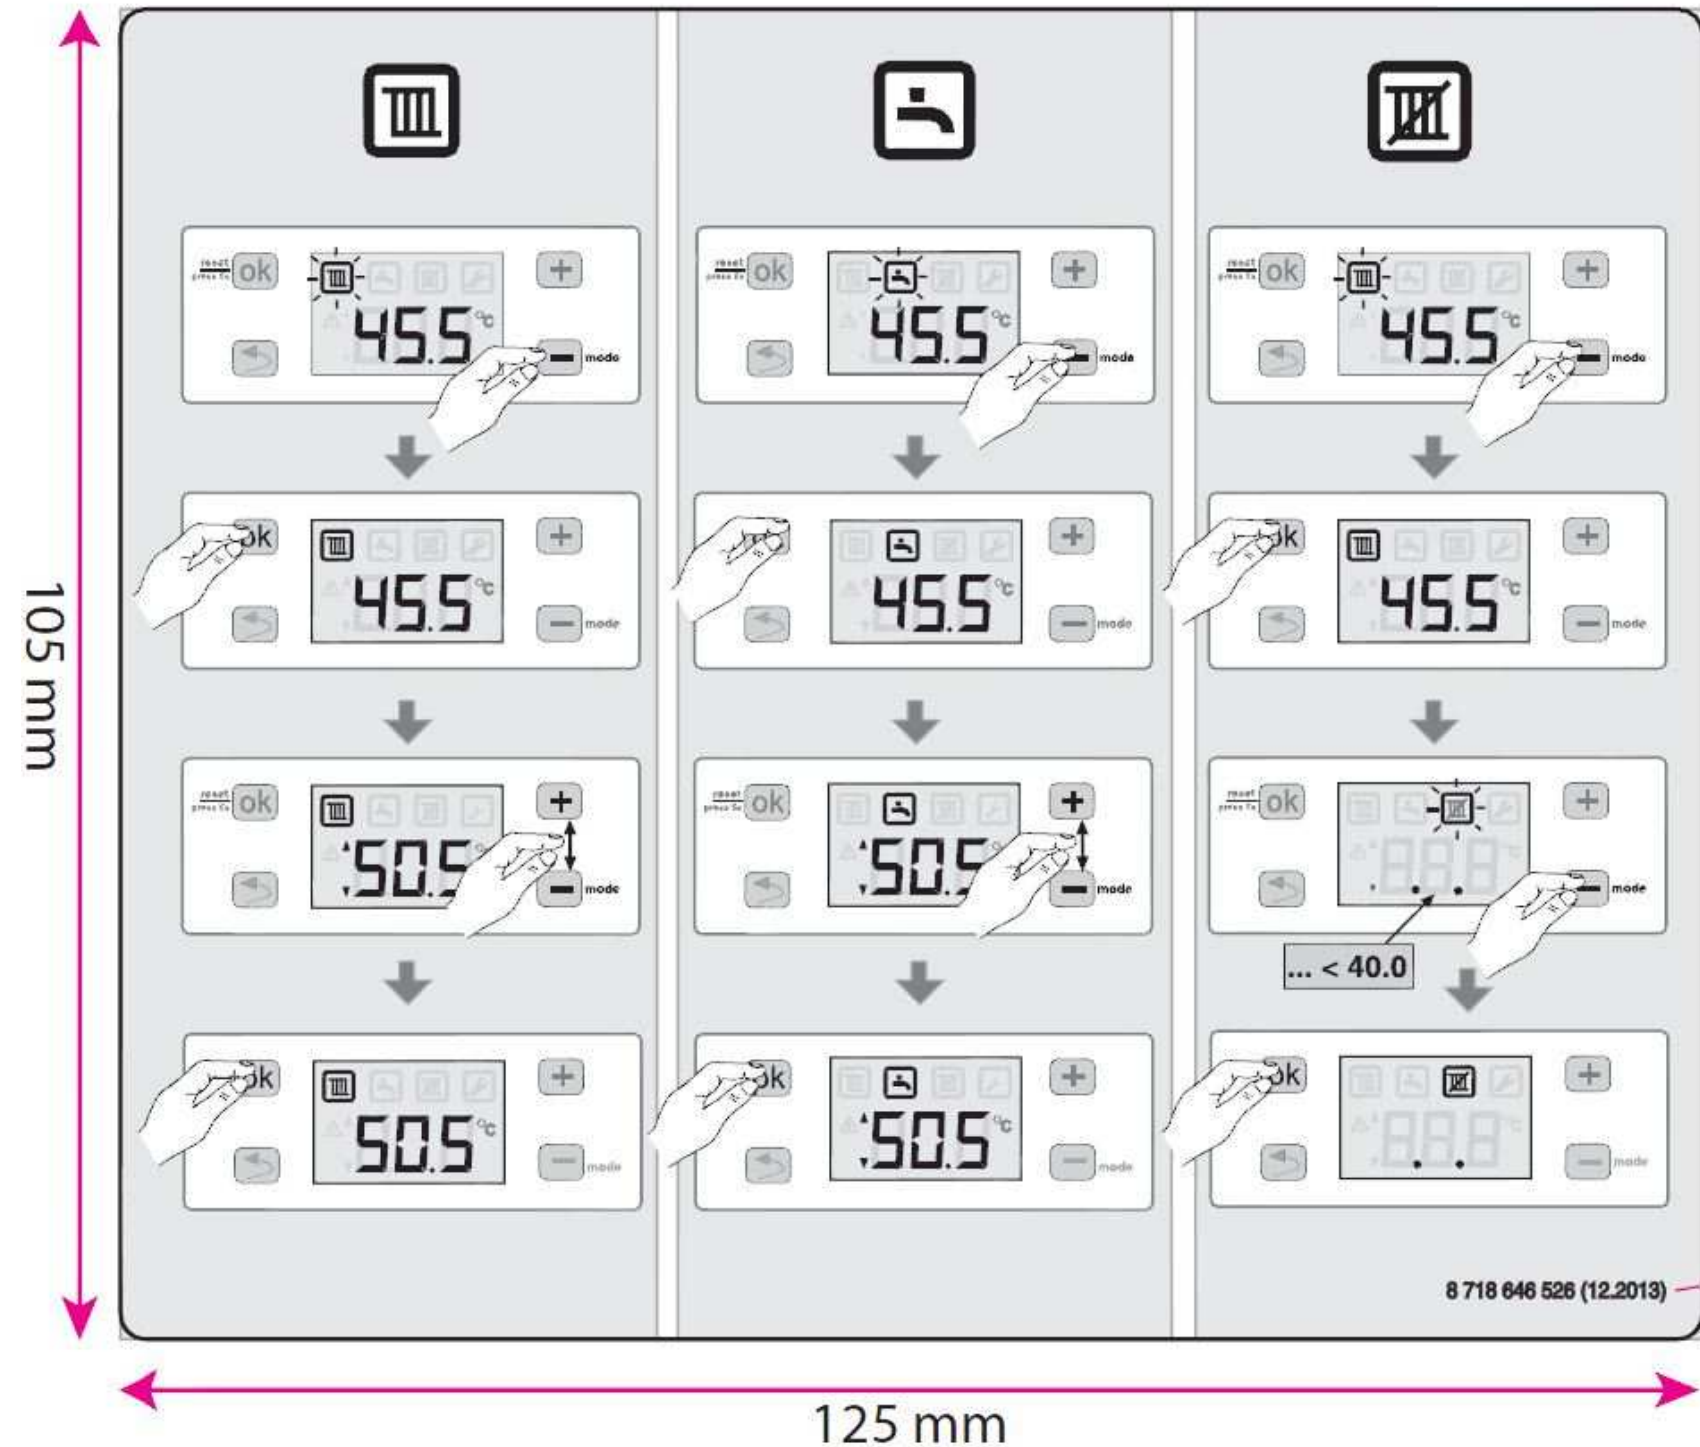

Helvetica font,
5 punt,
yazı yükseklik 1,6 mm

Print Colour : Acc. to original PDF file
 Total thickness : 0.45 + 0.1 mm
 General Tolerance : ± 10 mm
 Operation temperature : 0-70 °C
 Material : Magnetic strip with opaque PVC sheet

Surface quality of printed surface :
 Acc. to the norm 5 998 488 000
 Appendix B Part 3 Resistance against household-type cleaners
 Test procedure :
 Label must be tested on sheet metal (DX51/52/53/54) with 7-12 micron galvanized or Aluminium coating
 Sliding force: 5,5 g/cm² or 465 g/(label area)
 Acceptance criteria: No movement in the label when this force is applied.

Change description							Unit of measure: mm			
Introduction.										
00	8701X01388	20140106	DegirmGo	BozgeyAh	BozgeyAh	829	TT-WB/ENG-Man	0002		
Ind.	Change	YYYYMMDD	Drawn	Checked	Releas.	BWN	Resp.dept	Add. info		
Treatment/							Missed Details			
Mat. see BOM							From			
Lang	EN	Wght	KG	BOSCH			Label Quick BUDERUS BUDERUS Kolay Kullanım Etiketi			
Crit.P.	Scale	None	Mat.meets				Syst.	Doc.type	DRW	8 718 646 526
MNR 8718646526			N2580		UG		Repl. for		Repl. by	

© Robert Bosch GmbH. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.